

SEISMIC VULNERABILITY OF TRADITIONAL MASONRY BUILDING A CASE STUDY OF BYASI, BHAKTAPUR

Shyam Sundar Basukala¹, Prem Nath Maskey²

¹Department of Civil Engineering, Khwopa Engineering College, Libali-8, Bhaktapur, Nepal

²Department of Civil Engineering, Institute of Engineering, Pulchowk, Nepal

Abstract

Historic buildings of Nepal are mainly constructed from masonry structure. Since masonry structures are weak in tension which leads to the failure of structure. So, to avoid possible damage in environment lives and property it is urgent to conduct vulnerability assessments. Seismic vulnerability of historic masonry buildings constructed in Bhaktapur at Byasi area is carried out for the case study. Five load bearing masonry buildings were selected out of 147 buildings considering opening percentage, storey and type of floor for modeling in SAP 2000 V10 Various methods of rapid visual screening (FEMA 154, EMS 98) are used to determine the vulnerability of the selected building. The Selected Building response is carried out by linear time history analysis. The seismic vulnerability of masonry structures is determined in terms of fragility curves which represent the probability of failure or damage due to various levels of strong ground motions for different damage state slight, moderate, extensive and collapse. From the result of Rapid Visual Screening (RVS) and Fragility curves of the buildings it is found that whole, buildings are found vulnerable from future earthquake.

Keywords: Vulnerability, masonry building, RVS, time history analysis, Fragility curves

1. Introduction

The vulnerability assessment constitutes an important tool in the support to decision making related with the rehabilitation, strengthening or at the worst demolition of buildings, location of life-services, etc. Vulnerability can be briefly defined as 'being prone to or susceptible to damage or injury' (Blaikie et al, 1994).

Traditional building stock in Bhaktapur city is of Masonry structures, which have been constructed since the earliest days of civilization. Most of these traditional structures were constructed from the combination of masonry walls, wooden floor and tiles roof system. Particularly, the main component of such structures is load-bearing masonry walls. Generally, the load bearing masonry is made of bricks with mud or lime mortar. Therefore, such structures are most

vulnerable during an earthquake. Unreinforced Masonry structures showed poor performance evidence on the past earthquakes.

Nepal has many old cities, which are important from its traditional view point. But from structural view point they are more vulnerable to earthquake. So the damage evaluation is most necessary for such cities so that pre damage controlling can be done for the disaster mitigation. This will help in reduction of human loss as well as prevention of the cultural city.

2. Building Survey

Survey area is located in the historic city of Bhaktapur, which is located in the north east from the historic place Bhaktapur Durbar Square. We have collect data of 147 numbers of buildings. The survey location map and study area is shown in Fig 1, the main purpose of the structural survey of the buildings is to record the structural condition of the buildings. During the survey according to building storey, 5 storey building are higher in number, which is shown in Table 1 & 2.

*Corresponding author: Shyam Sundar Basukala
Department of Civill Engineering, Khwopa Engineering,
College, Libali-8, Bhaktapur, Nepal
Email: basukala.chanchal@gmail.com
(Received: 2016 Sept 09 Accepted: 2016 Nov 09)

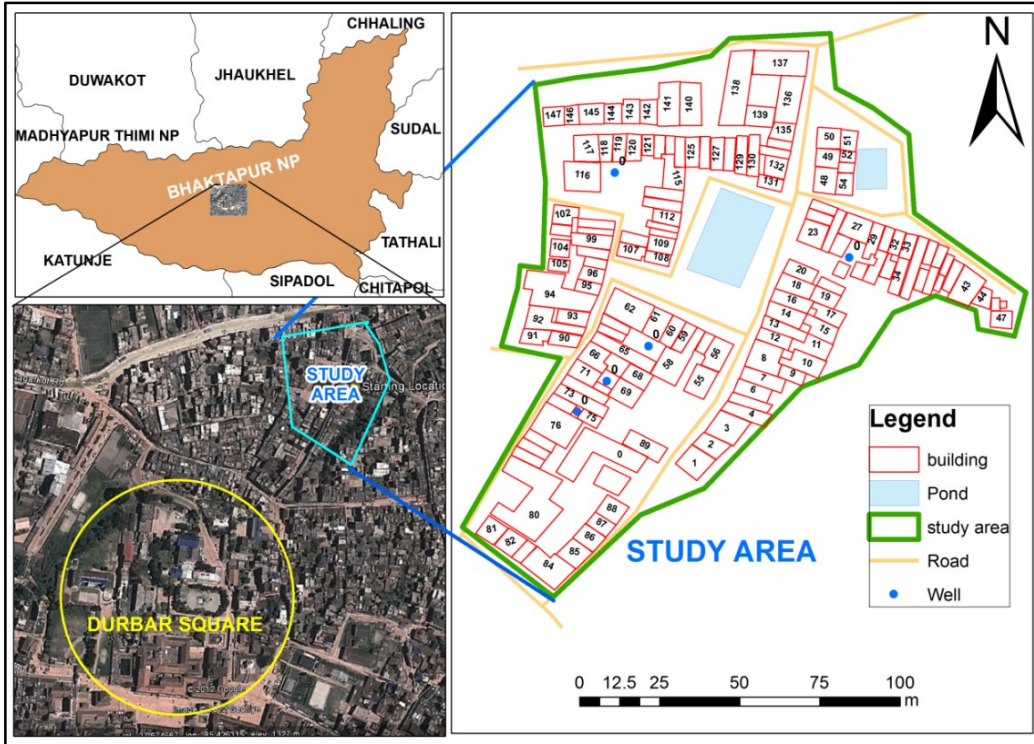


Fig 1 Survey Location Map

Table 1 Summary of Building Survey

Storey No	2	3	4	5	6	Sub Total	Grand Total	Remark
Building Nos	2	7	59	77	2	147	147	
Load Bearing wall	RCC Floor	0	0	2	2	0	147	
	Timber Floor	1	6	52	71	2		
RCC Frame	Timber Floor	0	0	1	2	0	8	
	RCC Floor	1	1	4	2	0		
Age	0-29	1	3	12	11	0	147	
	30-49	1	3	10	21	1		
	50-69	0	1	3	6	0		
	70-99	0	0	7	15	0		
	>100	0	0	27	24	1		
Height Difference between floors	0	2	25	32	2	61	61	
Opening % (From Façade)	<30	2	5	44	51	0	147	Opening of RCC Framed building is considered as 0%
	>30	0	2	14	22	2		
Large opening at GF	0	1	6	6	1	14	14	
Modification/repair of Building	0	0	34	48	2	84	84	
Damage building	1	3	44	61	2	111	111	

Table 2 Building Categories

SN	Building Category	Selected Building No.	Selection Criteria		Total No. Represented	Remark
			Opening %	Storey		
1	A	8	<30	5	48	Timber floor load bearing structure
2	B	93	>30	5	23	
3	C	109	<30	4	39	
4	D	118	>30	4	13	
5	E	143	>30	4	4	RCC floor

2.1 Selection of Buildings for Modeling

During selection of buildings for modeling and analysis various factors such as number of storey, opening percentage (consider façade only) and structure type was considered. Five buildings were selected from A to E (Table 2) based on given selection criteria. For instance, type A is represented by criteria of opening percentage less than 30 and five storey, which is represented by building number 8 of surveyed buildings 48 such building was found.

3. Vulnerability Analysis of Survey Buildings

RVS, FEMA 154, EMS 98 was used for the vulnerability analysis of the selected building. The result of Vulnerability analysis is shown in Table 3.

Table 3 RVS result of buildings

SN	Building No.	FEMA 154 Score (S)	EMS-98
			Damage Grade
1	8	0.3	Grade 2
2	93	0.8	Grade 1
3	109	0.3	Grade 3
4	118	0.3	Grade 1
5	143	0.8	No damage

4. Building Modeling

For masonry buildings, the stiffness depends on wall thickness, geometry and openings. So for the real buildings of Byasi area having different storey was taken for the analysis is modeled to determine the distribution of seismic forces between masonry and timber framed walls. Three dimensional thin shell modeling has been carried out for research purpose. Masonry wall is modeled as bi-dimensional thin shell element of

thickness 0.6 to 0.14 m according to sample building plan. Hinged assigned at wall support is an ideal case. For timber floor, two way equivalent timber floors hinged at the wall support is done. In this thesis, timber in both directions was provided assuming only one direction timber acts one at a time i.e. for a direction of seismic force, only lateral direction timber provides stiffness. Equivalent timer is obtained as timber floor of depth 15 cm and width 10 cm at spacing of 20 cm c/c spacing and planks of 2.5cm at span of 100 cm.

The materials properties for the modal analysis:

For Masonry wall (Thapa, 2011)

Weight per unit volume (γ) = 17.68 KN/m³

Poisson ratio (ν) = 0.25

Avg. shear strength = 0.142 N/mm²

Modulus of elasticity (E) = 632.21 N/mm²

Coefficient of friction (μ) = 0.25

Compressive strength = 0.56 N/mm²

For timber (IS 883 : 1994, 1994)

Weight per unit volume (γ) = 8.05 KN/m³

Modulus of elasticity (E) = 12600 N/mm²

Concrete (IS 883 : 1994, 1994)

Modulus of elasticity (E) = 5000 $\sqrt{f_{ck}}$,

Strength of concrete (f_{ck}) = 15 N/mm²

Poisson's ratio = 0.2

Unit weight of concrete = 24 KN/m³

Gravity load was calculated on the basis of unit weight of material and live load was taken as 2 KN/m². Models were designed using SAP 2000 V 10. The models for the analysis are shown in Fig 2.

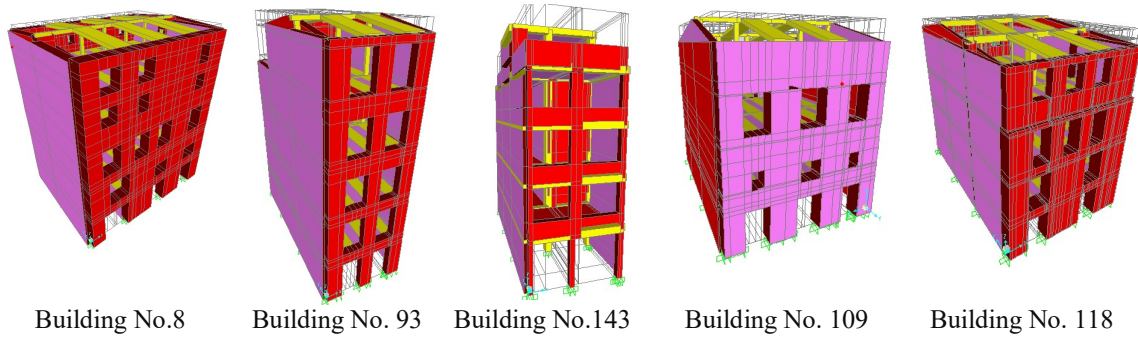


Fig 2 Models of samples buildings

5. Method of Analysis

After the completion of modeling in SAP 2000 V10, modal analysis was carried out. Linear time history analysis was carried out for different earthquake with scaling PGA. Chamauli earthquake with PGA = 0.45866g and Lalitpura with PGA = 0.4367g. The PGA is rescaled to 0.2g, 0.3g, 0.45g, 0.6g, 0.75g, 0.9g and 1g. From linear time history analysis, top displacements of building are determine for different rescaled PGA.

5.1 Seismic Input

Ground motions assumed for use in this research are synthetic earthquake that consists of a simulated ground motions time history of Chamauli and Lalitpura are shown in Fig 3. These ground motion time history contains simulated data for 10% in 50 years probability of exceedence.

5.2 Damage States

In this research damage states from HAZUS(Hazards U.S.) is adopted according to its assumption that the total variability of each equivalent-PGA structural damage state (β SPGA) is modeled by the combination of following two contributors to damage variability, uncertainty in the damage-state β M(SPGA) = 0.4 and variability in response β D(V) = 0.5 .The two contributors to damage state variability are assumed to be log normally distributed, independent random variables and the total variability is simply the square- root-sum-of-the-squares combination of individual variability terms β SPGA = 0.64 for all damage states (Slight, Moderate, Extensive and Complete damage).

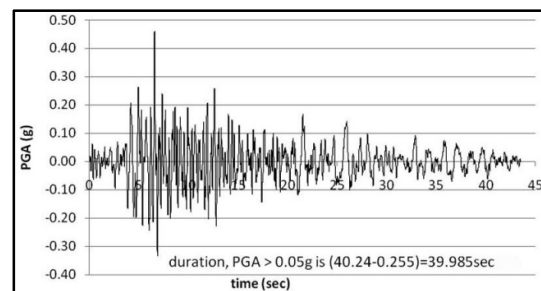


Fig 3 (a) Time history graph of Chamauli

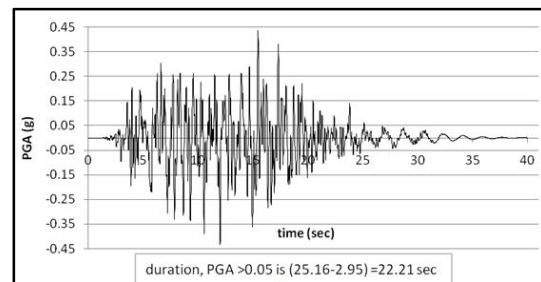


Fig 3 (b) Time history graph of Lalitpura

Four damage states are used as the capacity of the building (Glovinazzi et al. 2006)

$$\text{Slight} = 0.7d_y$$

$$\text{Moderate} = 1.5d_y$$

$$\text{Extensive} = 0.5(d_y + d_u)$$

$$\text{Complete} = d_u$$

where,

$$d_y = \text{yield displacement} = 0.27 \text{ inch}$$

$$d_u = \text{Ultimate displacement} = 1.81 \text{ inch}$$

6. Result and Discussion

Then linear time history analysis was performed for response of the selected buildings. The results were in terms of maximum (top) displacements. The fragility curves of each building with four damage states namely slight, moderate, extensive and complete for two earthquakes: Chamauli and lalitpura are demonstrated. These are derived from response and capacity analysis of the buildings.

The responses of other buildings in term of top displacements shows that the Lalitpura earthquake produce more displacement compared to Chaumali earthquake; however, the result is opposite for the case of building no 143 (Table 4).

Fragility analysis:

Fig 4 and 5 shows the fragility curves, which show probability of failure for different intensities of earthquake (PGA) as seismic input of chamauli and lalitpura earthquake with different damage state slight, moderate, extensive and collapse.

From the seismic hazard analysis map of Nepal, it is shown that peak ground acceleration for 10% exceedence probability in 50 years (return period is 475 years) is expected to be 0.4g near Kathmandu valley. The probability of failure of the buildings is observed for the value of peak ground acceleration at 0.4g. This is why the peak ground acceleration value 0.4g is considered in the current analysis.

Chamauli earthquake as seismic input:

The damage states for the fragility analysis were defined based on the values of probability of failure obtained from the fragility curve. Using the chamauli earthquake as seismic input to the time history analysis, the probability of failure is slight damage state to moderate state for building number 8 and 118 at 0.4g PGA. From the analysis it can be seen that building number 93 and 143 will be damaged extensive to complete damage state (Table5).

Lalitpura earthquake as seismic input:

In case of the lalitpura earthquake as a seismic input the probability of failure for building number 8 and 118 at 0.4g PGA is moderate

damage state. From the fragility analysis building number 93 will be damaged extensive to complete damage state whereas, for building number 143 extensively damage sate. It can be seen that in comparison to other buildings, building number 109 will be less vulnerable i.e. it will have slight damage according to fragility analysis (Table6). From fragility analysis probability of failure of building number 93 and 143 is very high because the damage state exceeds 50% in extensive damage state (Table 5 & 6).

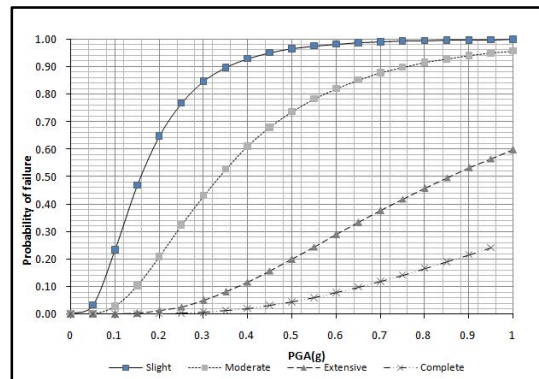


Fig 4 Fragility Curve of building no. 8 for various damage state at chamauli earthquake

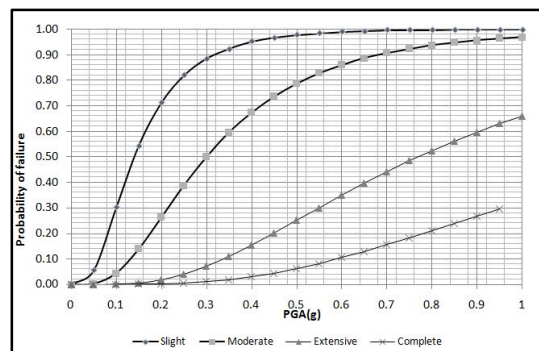


Fig 5 Fragility Curve of building no. 8 for various damage state at lalitpura earthquake

From fragility analysis probability of failure of building number 93 and 143 is very high because the damage state exceeds 50% in extensive damage state (Table 5 & 6).

Comparison between RVS method and Fragility curve:

From the analyses, it is shown that FEMA 154, Method the buildings are vulnerable in context of high seismic zone. Similarly, from the EMS-98 analysis, the damages could be seen in all the buildings except building number 143. In this regard all of these methods suggest that a detail analysis is sought for the building. The detail

analysis carried out using fragility analysis building number 93 is vulnerable to very heavy damage, building number 143 is vulnerable to heavy damage whereas building numbers 8 and 118 are vulnerable to moderate damage and building number 109 is vulnerable to slight damage. According to EMS-98 method these building showed different scenario in comparison to analytical method (Table 7).

Table 4 Top (max.) displacement Building (Demand)

PGA (g)	Buildings Response as Top (max.) displacement (mm)									
	Bldg no 8		Bldg no 93		Bldg no 109		Bldg no 118		Bldg no 143	
	Chamali	Lalitpura	Chamali	Lalitpura	Chamali	Lalitpura	Chamali	Lalitpura	Chamali	Lalitpura
0.2	6.19	6.868	24.017	30.448	1.712	1.790	5.404	5.675	18.588	11.284
0.3	9.287	10.301	36.026	45.669	2.568	2.696	8.105	8.511	27.882	16.117
0.45	13.409	15.453	54.03	68.507	3.852	4.045	12.157	12.768	41.821	25.389
0.6	18.575	20.603	72.046	91.338	5.136	5.393	16.209	17.022	55.760	33.851
0.75	23.218	25.754	90.057	114.176	6.420	6.742	20.261	21.280	69.699	42.315
0.9	27.719	30.906	108.073	137.014	7.704	8.091	24.315	25.537	83.643	50.779
1	29.167	34.339	120.076	152.235	8.560	8.990	27.015	28.374	92.932	56.420

Table 5 Probability of failure of building for PGA = 0.4g for chamali earthquake

SN.	Building No.	Probability of failure (%)				Damage State
		Slight	Moderate	Extensive	Complete	
1	8	93	62	12	0.2	moderate
2	93	100	100	82	53	heavy
3	109	30	4	0	0	slight
4	118	90	55	8	1	moderate
5	143	100	98	71	38	heavy

Table 6 Probability of failure of building for PGA = 0.4g for lalitpura earthquake

SN.	Building No.	Probability of failure (%)				Damage State
		Slight	Moderate	Extensive	Complete	
1	8	95	68	15	0.25	moderate
2	93	100	100	90	67	very heavy
3	109	33	5	0	0	slight
4	118	92	57	10	2	moderate
5	143	99	89	40	13	heavy

Table 7 Comparison between RVS method and Fragility curve of building

SN.	Building No.	Rapid Visual Screening		Analytical Method (Fragility curve)
		FEMA 154	EMS-98	
		Score (S)	Damage Grade	Damage State
1	8	0.3	Grade 2	moderate
2	93	0.8	Grade 1	Very heavy
3	109	0.3	Grade 3	slight
4	118	0.3	Grade 1	moderate
5	143	0.8	No damage	heavy

7. Conclusion

Five buildings of different storey and floor type are taken for the analysis from RVS and analytical method. The fragility curves shows buildings are in vulnerable state. The curves are useful for pre-disaster planning and loss i.e. lives and property estimation of masonry building due to potential earthquake.

The following major conclusions are drawn from the current research.

1. For the selected buildings with opening percentage greater than 30% shows high degree of damage compare to the other building with less opening.
2. Wall continuity in elevation also shows grate effect in the performance of building.
3. Evaluation of structure with two different earthquakes shows similar result for given structure.
4. Fragility curves are different for different buildings due to the variation in modal frequencies, plan irregularities, height irregularities and openings.
5. The maximum Top displacement for Building no 8 for 1g is 30.95mm for Chamauli and Lalitpura is 34.33mm. This variation in displacement is due variation in duration and frequency content. Similar variation in displacement can be seen in other building as well.

The fragility curves when read along with seismic hazard map will provide excellent decision making information about retrofit requirement of masonry structures. So, it is recommended to update the seismic hazard map all over the country.

References

[1] Arya, A. S. (2008). Seismic Assessment of Masonry Buildings. *Journal of South Asia Disaster Studies*, 1 (1).

- [2] Blaikie, P. C. (1994). At risk. Natural hazards, people's vulnerability and disasters.
- [3] Colangelo, F. (2008, October 12-17). On The Computation Of Seismic Fragility Curves. 14th World Conference On earthquake engineering .
- [4] D'Ayala, D. D. (2004). Correlation Of Fragility Curves For Vernacular Building Types: Houses In Lalitpur, Nepal And In Istanbul, Turkey. 13th World Conference on Earthquake Engineering (485).
- [5] E.Speranza, D. D. (2003). An Integrated Procedure For The Assessment Of Seismic Vulnerability Of Historic Buildings. Of Seismic Vulnerability Of Historic Buildings. 12th European Conference on Earthquake Engineering .
- [6] FEMA 154, Rapid Visual Screening of Buildings for Potential Seismic Hazards: A HANDBOOK (2nd Edition ed.). (March 2012).
- [7] Grünthal, G. (Ed.). (1998). European Macroseismic Scale 1998 EMS-98. 15.
- [8] IS 883 : 1994. (1994). Design Of Structural Timber In Building - Code Of Practice . Bureau of Indian Standards.
- [9] K. Nasseradi, M. G.-A. (2009). Developing Seismic Fragility Functions Of Structures By Stochastic Approach.
- [10] M. Rota, A. P. (2008, October 12-17). A Procedure For Deriving Analytical Fragility Curves For Masonry Buildings. The 14 .
- [11] Maskey, P. N. (2002). Seismic Risk of Bhaktapur City and It's Monumental structures. PhD Thesis, Tribhuvan University, Department of Civill Engineering.
- [12] Ranganathan, R. (1990). Reliability Analysis and Design of Structures. NewDelhi, India.: TATA McGRAW7Hill Publishing Company Limited.
- [13] Thapa, J. B. (2011). Test and Simulation of Brick Masonry Wall of Historical Buildings. M.Sc. Thesis, I.O.E. Pulchowk Campus, Department of Civil Engineering.
- [14] Glovinazzi et al (2006). Displacement capacity of ancient structures through non -linear kinematic and dynamic analyses